
# Air Conditioning

Product Information MSZ-LN Inverter Heat Pump Wall Mounted System

Making a World of Difference

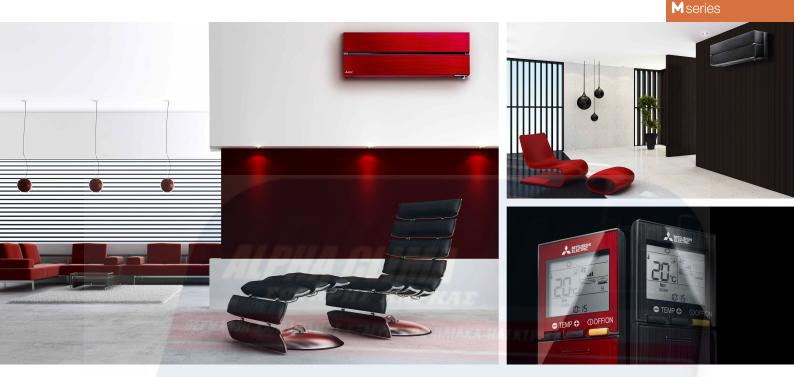

The MSZ-LN range is a wall mounted system that blends energy efficiency with a sophisticated streamlined design. Finished with a range of deep, rich colours and a premium quality feel, this range utilises low GWP R32 refrigerant.

## **Key Features**

- New stylish design, available in Ruby Red, Onyx Black, Pearl White and Natural White colours
- Highly energy efficient operation, utilising low GWP R32 refrigerant
- i-see Sensor provides customised comfort by automatically monitoring room occupancy, position and body temperatures
- Built in Wi-Fi interface enabling control and monitoring via the MELCloud app
- Double vanes operate independently to distribute airflow evenly throughout the room
- Plasma Quad Plus filter uses powerful plasma technology to filter out even microscopic particles

 $\mathbf{232}$ 

- Dual-Barrier Coating to the heat exchanger, fan and air duct prevents dust and grease accumulation
- Quiet operation with industry leading low noise levels
- Weekly timer
- Replace Technology available



Air Conditioning | Heating Ventilation | Controls

## **Product Information**

# Air Conditioning

# **MSZ-LN Inverter Heat Pump** Wall Mounted System

Making a World of Difference






Onvx Black (B)


MSZ-LN - INDOOR UNITS		MSZ-LN25VG R/B/V/W	MSZ-LN35VG R/B/V/W	MSZ-LN50VG R/B/V/W	MSZ-LN60VG R/B/V/W
CAPACITY (KW)	Heating (nominal) Cooling (nominal)	3.2 (0.8 - 5.4) 2.5 (1.0 - 3.5)	4.0 (1.0 - 6.3) 3.5 (0.8 - 4.0)	6.0 (1.0 - 8.2) 5.0 (1.0 - 6.0)	6.8 (1.8 - 9.3) 6.1 (1.4 - 6.9)
	Heating (UK) Cooling (UK)	2.64 (0.66 - 4.45) 2.48 (0.99 - 3.47)	3.3 (0.83 - 5.2) 3.47 (0.79 - 3.96)	4.94 (0.82 - 6.75) 4.95 (0.99 - 5.94)	5.6 (1.48 - 7.66) 6.05 (1.38 - 6.84)
SHF (nominal)		0.97	0.90	0.77	0.75
COP / EER (nominal)		5.52 / 5.15	5.00 / 4.27	4.05 / 3.62	3.76 / 3.41
SCOP / SEER (BS EN14825)		5.2 / 10.5	5.1 / 9.5	4.6 / 8.5	4.6 / 7.5
ErP ENERGY EFFICIENCY CLASS	Heating/Cooling	A+++ / A+++	A+++ / A+++	A++ / A+++	A++ / A++
AIRFLOW (I/s)	Heating (SLo-Lo-Mid-Hi-SHi)	67-95-118-142-240	71-97-118-142-228	90-107-142-178-262	110-158-192-227-262
	Cooling (SLo-Lo-Mid-Hi-SHi)	71-97-118-147-198	71-97-118-147-213	95-127-148-177-232	118-147-177-212-262
PIPE SIZE MM (in)	Gas	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	12.7 (1/2")
	Liquid	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")
SOUND PRESSURE LEVEL (dBA)	Heating (SLo-Lo-Mid-Hi-SHi)	19-24-29-36-45	19-24-29-36-45	25-29-34-39-47	29-37-41-45-49
	Cooling (SLo-Lo-Mid-Hi-SHi)	19-23-29-36-42	19-24-29-36-43	27-31-35-39-46	29-37-41-45-49
SOUND POWER LEVEL (dBA)		58	58	60	65
DIMENSIONS (mm)	Width x Depth x Height	890 x 233 x 307	890 x 233 x 307	890 x 233 x 307	890 x 233 x 307
WEIGHT (kg)		15.5	15.5	15.5	15.5
ELECTRICAL SUPPLY	3	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit
FUSE RATING (BS88) - HRC (A)		6	6	6	6
INTERCONNECTING CABLE No. CORES		4	4	4	4

MUZ-LN - OUTDOOR UNITS		MUZ-LN25VG	MUZ-LN35VG	MUZ-LN50VG	MUZ-LN60VG
SOUND PRESSURE LEVEL (dBA)	Heating/Cooling	49 / 46	50 / 49	54 / 51	55 / 55
SOUND POWER LEVEL (dBA)	Cooling	60	61	64	65
WEIGHT (kg)	(11212/1-12)	35	35	40	55
DIMENSIONS (mm)	Width x Depth x Height	800 x 285 x 550	800 x 285 x 550	800 x 285 x 714	840 x 330 x 880
ELECTRICAL SUPPLY		220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
PHASE	SAMSU	Single	Single	Single	Single
SYSTEM POWER INPUT (kW)	Heating/Cooling (nominal)	0.580 / 0.485	0.800 / 0.820	1.480 / 1.380	1.810 / 1.790
	Heating/Cooling (UK)	0.523 / 0.406	0.722 / 0.686	1.335 / 1.151	1.632 / 1.494
STARTING CURRENT (A)		3.0	4.0	6.8	7.9
SYSTEM RUNNING CURRENT (A)	Heating/Cooling [MAX]	3.0 / 2.5 [7.1]	4.0 / 3.9 [9.9]	6.8 / 6.3 [13.9]	7.9 / 7.9 [15.2]
FUSE RATING (BS88) – HRC (A)		10	10	16	16
MAINS CABLE No. CORES		3	3	3	3
MAX PIPE LENGTH (m)		20	20	20	30
MAX HEIGHT DIFFERENCE (m)		12	12	12	15
CHARGE (kg) / CO2 EQUIVALENT (t) - R32 (GWP 675) - 7m		1.0 / 0.68	1.0 / 0.68	1.25 / 0.85	1.45 / 0.98
MAX ADDED QUANTITY (kg) / CO2 EQUIVALENT (t) - R32 (GWP 675)		0.26 / 0.18	0.26 / 0.18	0.26 / 0.18	0.46 / 0.32


### PRODUCT DIMENSIONS



#### Front View









Telephone: 01707 282880

email: air.conditioning@meuk.mee.com

web: airconditioning.mitsubishielectric.co.uk microsite: timeforR32.co.uk

UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division

Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England General Enquiries Telephone: 01707 282880 Fax: 01707 278881 IRELAND Mitsubishi Electric Europe Westgate Business Park, Ballymount, Dublin 24, Ireland

Telephone: Dublin (01) 419 8800 Fax: Dublin (01) 419 8890 International code: (003531)

Country of origin: United Kingdom – Japan – Thaland – Malaysia. (Mitsubishi Electric Europe 2017. Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any varialited specification to the enuipment described, or to withdraw or replace products. All descriptions, illustrati drawings and specifications in the enuipment description (general particulars and shall not mark and y contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

The fuse rating is for guidance only. Please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electricial engineer to select the correct cable size and fuse rating based on current regulatic te specific conditions. MISUSH's Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R4104(GWP-2088), R23(GWP-675), R407C (GWP-1774) or R134 (GWP-1300), These GWP are based on RegulationEUN bioT22014 from IPCC of RegulationEUN bioD2622011 from IPCC 3rd edition, these are as follows. R4104(GWP-1307), R25(GWP-550), R407C (GWP-1550), R4074 (GWP-1304), reas based on RegulationEUN bioT22014 from IPCC of RegulationEUN bioD22014 for IPCC 3rd edition.





www.greengateway.mitsubishielectric.co.uk

Mitsubishi Electric UK's commitment to the environment

Green

Gatewav

mitsubishielectric2

Effective as of February 2017